



IG7600 & M62 IP Phone

Software Upgrade Procedure

Oct 29, 2014

Copyright © 2009-2014 TECOM

All Rights Reserved

*Information contained within this document is the property of TECOM,
No part of this document may be reproduced without
the expressed written consent of TECOM.*

Index:

1. IG7600 Software Upgrade procedure

- Step 1: Login IG7600 web page.
- Step 2: Software upgrade
- Step 3: Restore default Settings

2. M62 IP Phone Software Upgrade Procedure

2.1 M62 IP phone software upgrade by IG7600

- Step 1: Upgrade M62 IP phone software
- Step 2: Check software version

2.2 Login M62 IP phone web page to upgrade software

- Step 1: To get M62 IP phone's IP address.
- Step 2: On the PC, use browser (Ex: IE) to browse M62 IP phone's IP address
- Step 3: Software Upgrade
- Step 4: Check software version

1. IG7600 Software Upgrade Procedure:

Step1: Login IG7600 web page.

1. Connect your PC to IG7600 via Ethernet cable.
2. Using browser (Ex: IE) to browse IG7600 web page.

Default IP: 192.168.123.1


Account: admin1234

Password: adminxxxxxx

(xxxxxxx = The last 6 alphanumeric characters of the system's WAN MAC Address (lower case))

Step 2: Software upgrade

1. Select "Management" from the menu at left side.
2. Select "Upgrade Software".
3. In the "Upgrade Software" page, click "Browse" button and then select IG7600 software file. (Ex: MOCET_IG7600-V0.5.1.7.img).
4. Click "Upgrade Software" button to start software upgrade.

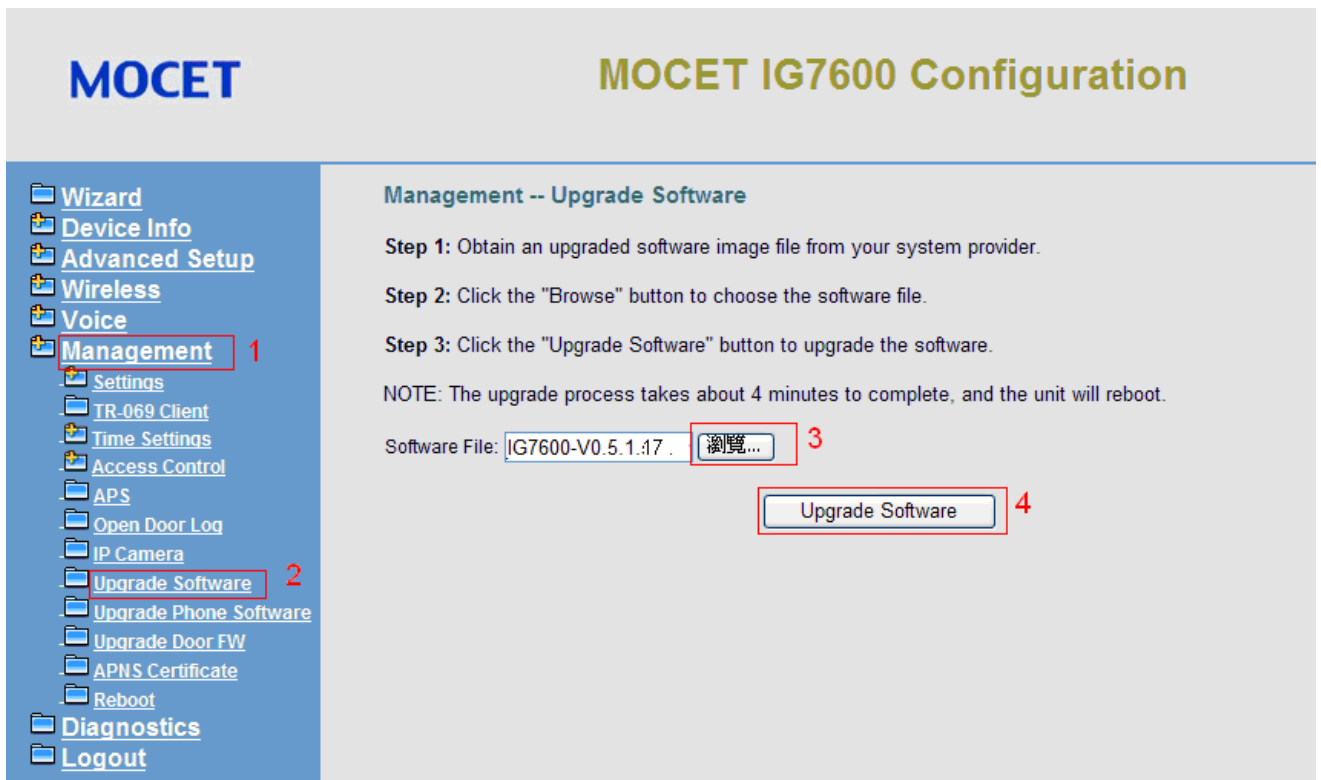

The screenshot displays the MOCET IG7600 Configuration web interface. On the left is a navigation menu with the following items: Wizard, Device Info, Advanced Setup, Wireless, Voice, Management (highlighted with a red box and labeled '1'), Settings, TR-069 Client, Time Settings, Access Control, APS, Open Door Log, IP Camera, Upgrade Software (highlighted with a red box and labeled '2'), Upgrade Phone Software, Upgrade Door FW, APNS Certificate, Reboot, Diagnostics, and Logout. The main content area is titled "MOCET IG7600 Configuration" and "Management -- Upgrade Software". It contains the following text: "Step 1: Obtain an upgraded software image file from your system provider.", "Step 2: Click the 'Browse' button to choose the software file.", "Step 3: Click the 'Upgrade Software' button to upgrade the software.", and "NOTE: The upgrade process takes about 4 minutes to complete, and the unit will reboot." Below this text, the "Software File:" field contains "IG7600-V0.5.1.7." and a "瀏覽..." (Browse) button (highlighted with a red box and labeled '3'). At the bottom right, there is an "Upgrade Software" button (highlighted with a red box and labeled '4').

- The software upgrade is in process.

MOCET
MOCET IG7600 Configuration
[Lang](#)

- Wizard
- Device Info
- Advanced Setup
- Wireless
- Voice
- Management
 - Settings
 - TR-069 Client
 - Time Settings
 - Access Control
 - APS
 - Open Door Log
 - IP Camera
 - Upgrade Software
 - Upgrade Phone Software
 - Upgrade Door FW
 - APNS Certificate
 - Reboot
- Diagnostics
- Logout

Management -- Upgrade Software

The software upgrade is in process. The device will reboot when completing the upgrade. Please do not interrupt the power supply and wait until the power LED turns back to steady BLUE.

Please wait...

218

- After software upgrade is done, the new software version is displayed.

MOCET
MOCET IG7600 Configuration
[Lang](#)

- Wizard
- Device Info
- Advanced Setup
- Wireless
- Voice
- Management
 - Settings
 - TR-069 Client
 - Time Settings
 - Access Control
 - APS
 - Open Door Log
 - IP Camera
 - Upgrade Software
 - Upgrade Phone Software
 - Upgrade Door FW
 - APNS Certificate
 - Reboot
- Diagnostics
- Logout

Device Info

Software Version:	V0.5.1.17
Bootloader (CFE) Version:	1.0.37-102.11
Wireless Driver Version:	5.10.120.0.cpe4.402.9
Serial Number:	20
MAC Address:	00:19:15:DA:73:08
System Up Time:	0 day, 0 hour, 1 minute

LAN Info

LAN IP Address:	192.168.123.1
Subnet mask:	255.255.255.0
WLAN SSID (Primary):	IG7600-DA7308

WAN Info


Primary WAN Info

WAN IP Address:	0.0.0.0
Subnet mask:	0.0.0.0

For IG7600, since we add some new features (Ex: video doorphone...) in this version V0.5.1.7, please restore default settings once, IG7600 will reload the new parameters for these new features.

Step 3: Restore default Settings

1. Select "Management" from the menu at left side.
2. Select "Restore Default".
3. Select "Restore All".
4. Click "Restore" button.

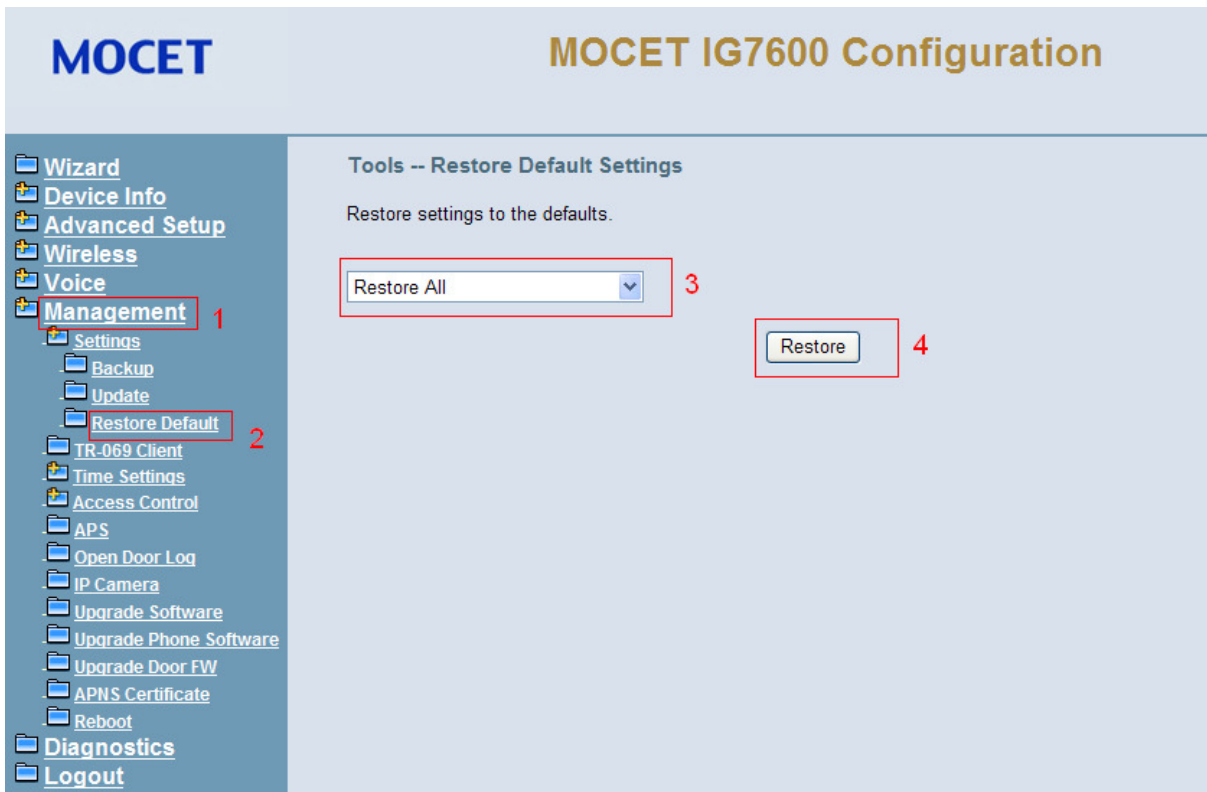

The screenshot displays the MOCET IG7600 Configuration web interface. On the left, a navigation menu lists various settings categories. 'Management' is selected and highlighted with a red box and the number 1. Under 'Management', 'Restore Default' is also highlighted with a red box and the number 2. The main content area is titled 'Tools -- Restore Default Settings' and contains the instruction 'Restore settings to the defaults.'. Below this, there is a dropdown menu with 'Restore All' selected, highlighted with a red box and the number 3. To the right of the dropdown is a 'Restore' button, also highlighted with a red box and the number 4.

2. M62 IP Phone Software Upgrade Procedure:

There are two software upgrade ways. You can choose one of two ways to upgrade your M62 IP phone software.

1. M62 IP phone software upgrade by IG7600.


(This way only used for when M62 IP phone is registered to IG7600. If there are many M62 IP phones already registered with IG7600, you can use this way to upgrade all M62 IP phones.)

2. Login M62 IP phone web page to upgrade software.

M62 IP phone software upgrade by IG7600.

Step 1: Upgrade M62 IP phone software

1. In IG7600 web page, select “Management” from the menu at left side.
2. Select “Upgrade Phone Software” from the menu at left side.
3. In the “Upgrade Phone Software” page, click “Browse” button and then select M62 software file (Ex: M62_V0.5.0.8.bin.gz).
4. Click “Upgrade Software” button.

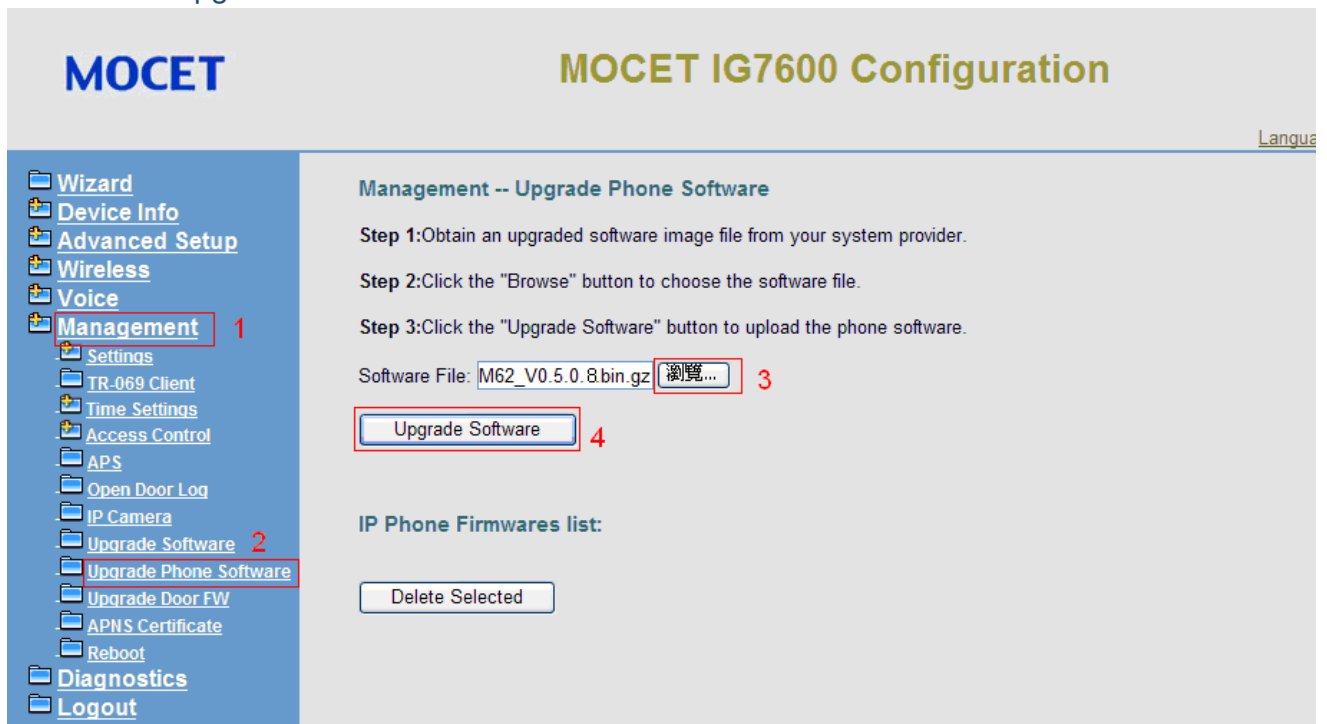

MOCET **MOCET IG7600 Configuration**

Language

Management -- Upgrade Phone Software

Step 1: Obtain an upgraded software image file from your system provider.

Step 2: Click the "Browse" button to choose the software file.

Step 3: Click the "Upgrade Software" button to upload the phone software.

Software File: M62_V0.5.0.8.bin.gz 3

4

IP Phone Firmwares list:

The M62 IP phones software will be upgraded automatically by IG7600 in 5 minutes. During software upgrade, the M62 IP phones will auto reboot once.



Step 2: Check software version


After software upgrade is done, please check the new software version by LCM of M62 IP phone.

On the M62 IP phone, select “Menu” -> “3. Information”, and then press down key to switch to “Application Version” screen. The new version is displayed as following:

Phone Information:
Application Version
F_5_4_V0.5.0.8

Login M62 IP phone web page to upgrade software.

Step 1: Connect PC to PC port on the rear of panel of M62 IP phone.

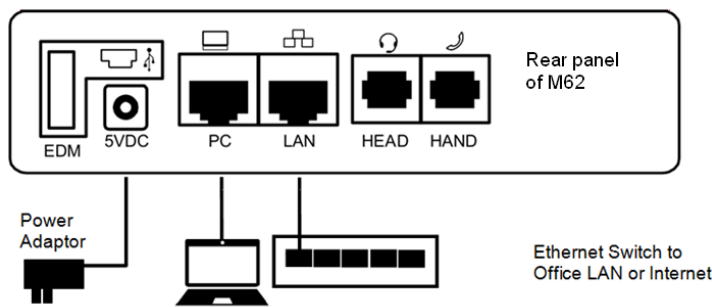

Step 2: To get M62 IP phone's IP address.

Get the IP address for M62 IP phone, select "Menu" -> "3. Information", and then press down key to switch to "IP Address" screen. The IP Address is displayed as following:

Phone Information:
IP Address
192.168.123.xxx

Step 3: On the PC, use browser (Ex: IE) to browse M62 IP phone's IP address (192.168.123.xxx)


Default User name: admin
Default Password: 1234

Step 4: Software Upgrade.

1. Select "SW Upgrade" tag.
2. Click "Browse" button ,and then select M62 IP phone software file (Ex: M62_V0.5.0.8.bin.gz)
3. Click "Update" button.

MOCET

M62 Configuration

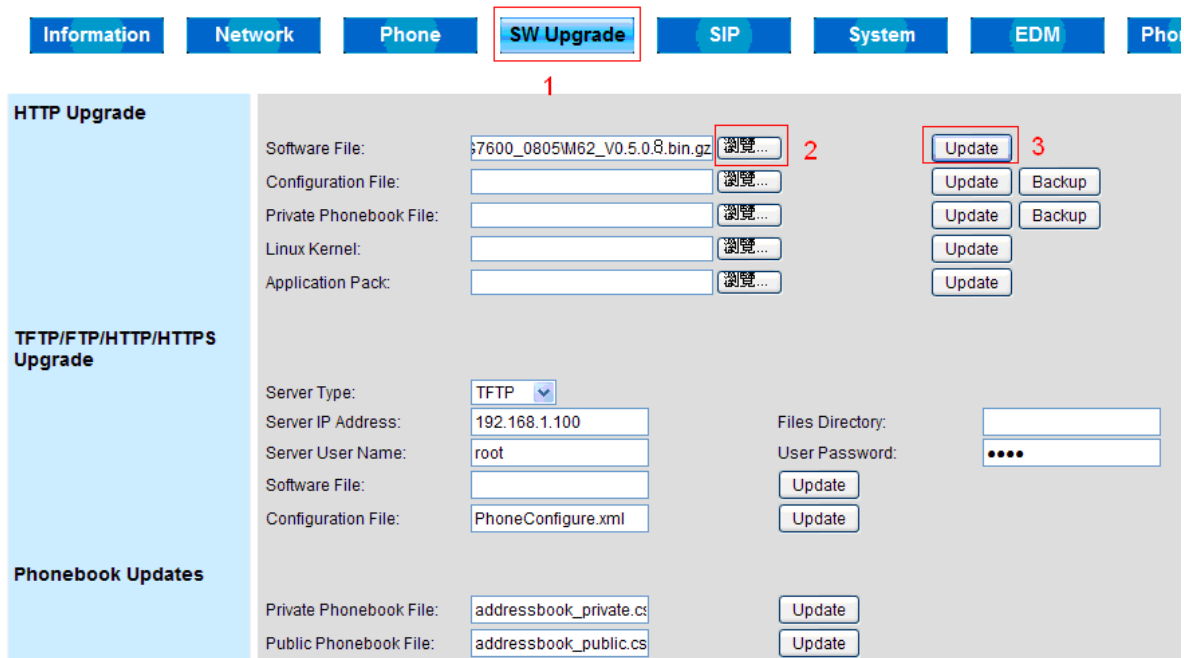

Information **Network** **Phone** **SW Upgrade** **SIP** **System** **EDM** **Pho**

HTTP Upgrade

Software File: 7600_0805M62_V0.5.0.8.bin.gz

Configuration File:

Private Phonebook File:

Linux Kernel:

Application Pack:

TFTP/FTP/HTTP/HTTPS Upgrade

Server Type: TFTP

Server IP Address: 192.168.1.100 Files Directory:

Server User Name: root User Password:

Software File:

Configuration File: PhoneConfigure.xml

Phonebook Updates

Private Phonebook File: addressbook_private.cs

Public Phonebook File: addressbook_public.cs

During the software upgrading, the following message is displayed:

Phone is upgraded now, please check running state and wait, then reopen your web browser after automatically reboot...

Step 5: Check software version.

The new version is displayed on “Information” page.

MOCET

M62 Configuration

- Information
- Network
- Phone
- SW Upgrade
- SIP
- System
- EDM
- Phone

Network Information	Network Type: DHCP	Current IP: 192.168.123.6
	Subnet Mask: 255.255.255.0	Default Gateway: 192.168.123.1
	Primary DNS: 192.168.123.1	Secondary DNS: 192.168.123.1
Product Information	Product Name: M62	Application Version: F_5_4_V0.5.0.8
	Firmware Version: F_5_3_V0.2.11C_2014-03-04	Hardware Version: M62_PR
	SN: F4D14269	
	MAC Address: 00:19:15:DB:A7:08	
Phone Status	Phone Number: 219	Registration State: Registered
	SIP Proxy Server: 192.168.123.1	